

# artisan EXTERIOR

FLOOR  
PORCELAIN - ALL FORMATS

Technical Specification Guide



# Table of Contents

Introduction.....	3
Product Reference Images .....	4-7
<b>Struktura Series.....</b>	<b>4-6</b>
Quadria Collection	4
Vialto Collection	5-6
<b>Stone Series .....</b>	<b>6</b>
Format Reference Images .....	7
Technical Details.....	8-18
<b>Struktura Series.....</b>	<b>8-15</b>
Quadria Collection	8-10
Dodese	8
Eboro	8-9
Elva	9
Neberi	10
Nio	10-11
Vialto Collection	12-16
Aon	12
Chaya	12-13
Ketto	13
Keturi	13-14
Lima	14
Saba	15
Telo	15-16
Tressi.....	16
<b>Stone Series</b>	<b>17-19</b>
Fossil Black Quartz	17
Malmo	17-18
Oslo	18
Vienna	18-19

# Innovative Porcelain for Design and Performance

Artisan Exterior's porcelain collection combines cutting-edge manufacturing technology with the timeless appeal of natural stone. Sourced from leading global producers and warehoused locally, the range offers exceptional durability, superior performance, and a wide variety of designs. Our Porcelain Range includes the Struktura Series - featuring Vialto and Quadria Collections - and the Stone Series, with options suitable for both interior and exterior applications.

Available in a diverse selection of formats, colours, textures, and finishes, our porcelain tiles, pavers, and coping bring modern sophistication to any space. Whether you're drawn to sleek contemporary tones or the understated beauty of stone-effect finishes, every product delivers low-maintenance performance, family-friendly durability, and a P5 slip rating - making them ideal for pool surrounds and outdoor living.

Visit our ACT, NSW, or QLD studios to explore full-scale installations, discuss your project, and take home samples. For specifications or expert guidance, our team is ready to support your design from concept to completion.



Porcelain Pavers & Coping with Rebated Drop Edge  
Struktura Series | Vialto Collection | Saba

# Porcelain - Pavers & Tiles

## STRUKTURE SERIES - QUADRIA COLLECTION



DODESE



EBORO



ELVA



NEBERI



NIO

# Porcelain - Pavers & Tiles

## STRUKTURE SERIES - VIALTO COLLECTION



AON



CHAYA



KETTO



KETURI



LIMA




SABA

# Porcelain - Pavers & Tiles

## STRUKTURE SERIES - VIALTO COLLECTION (Continued)




TELO

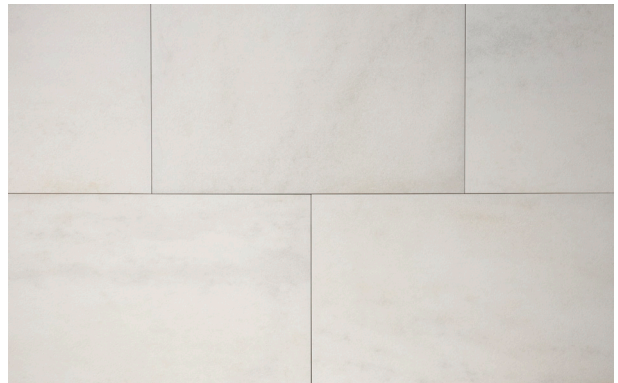

TRESSI


## STONE SERIES

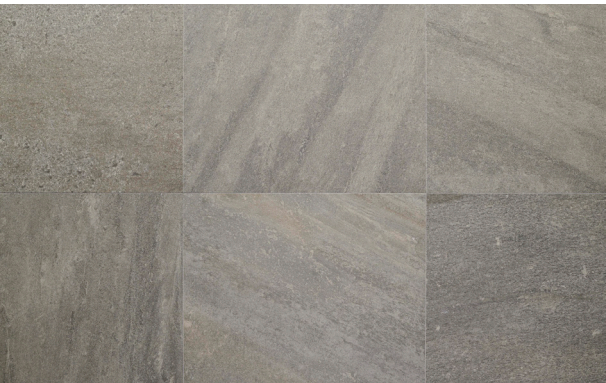

FOSSIL BLACK QUARTZ



MALMO

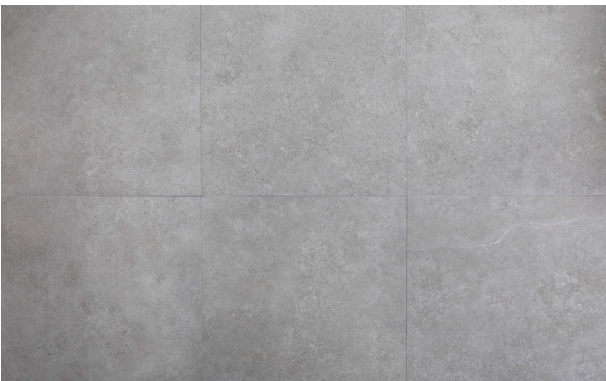

OSLO



VIENNA

# Format Reference Images

## PAVERS & TILES




### Tile Formats

Up to 20mm thickness, within tolerance


### Paver Formats

20mm thickness and above, within tolerance


## COPING, REBATES & PROFILES




Coping




Rebate (Drop Edge)



Bullnose



Pencil Round



Rebated Profile

# Strukture Series Technical Details

\* Please enquire with us to confirm stock availability.  
 Custom sizes are available by order. Weights are indicative only and exclude packaging \*

DODESE - Quadria Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30      >12500      >48      150      <0.1      ± 0,4 %, max ± 1,8 mm

Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension    Thickness	
---------	---------------------------------	------------	------------------------	-------------	--	--

## Pavers & Tiles

600x600x20mm      P5      54kg/m<sup>2</sup>      21.62m<sup>2</sup>      Rectified      +/- 0.5mm    +/- 0.5mm

## Copings

600x600x20mm      P5      20kg each      By Order      Rectified (Profiles Available)      +/- 2mm    +/- 0.5mm

600x400x20mm      P5      14kg each      By Order      Rectified (Profiles Available)      +/- 2mm    +/- 0.5mm

600x290x20mm      P5      10kg each      By Order      Rectified (Profiles Available)      +/- 2mm    +/- 0.5mm

Rebated  
600x600x20mm /80mm      P5      22kg each      By Order      Rebate      +/- 2mm    +/- 0.5mm

Rebated  
600x400x20mm /80mm      P5      17kg each      By Order      Rebate      +/- 2mm    +/- 0.5mm

Rebated  
600x300x20mm /80mm      P5      14kg each      By Order      Rebate      +/- 2mm    +/- 0.5mm

EBORO- Quadria Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30      >12500      >48      150      <0.1      ± 0,4 %, max ± 1,8 mm

Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension    Thickness	
---------	---------------------------------	------------	------------------------	-------------	--	--

## Pavers & Tiles

600x600x20mm      P5      54kg/m<sup>2</sup>      21.62m<sup>2</sup>      Rectified      +/- 0.5mm    +/- 0.5mm

## Copings

600x600x20mm      P5      20kg each      By Order      Rectified (Profiles Available)      +/- 2mm    +/- 0.5mm

600x400x20mm      P5      14kg each      By Order      Rectified (Profiles Available)      +/- 2mm    +/- 0.5mm

600x290x20mm      P5      10kg each      By Order      Rectified (Profiles Available)      +/- 2mm    +/- 0.5mm

# Strukture Series Technical Details \* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging \*

EBORO - Quadria Collection (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
<b>Copings (Continued)</b>							
Rebated 600x600x20mm /80mm	P5	22kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	17kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	14kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
ELVA- Quadria Collection							
Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage	
	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO2	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
25	>13600	>50	145	<0.5		± 0,4 %, max ± 1,8 mm	
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
<b>Pavers &amp; Tiles</b>							
600x600x20mm	P5	54kg/m <sup>2</sup>	21.62m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm	
<b>Copings</b>							
600x600x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	14kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	10kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	22kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	17kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	14kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

# Strukture Series Technical Details \* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging \*

NEBERI - Quadria Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

25      >13600      >50      145      <0.5      ± 0,4 %, max ± 1,8 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension    Thickness	
---------	--	------------	------------------------	-------------	--	--

### Pavers & Tiles

600x600x20mm	P5	54kg/m <sup>2</sup>	21.62m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
--------------	----	---------------------	---------------------	-----------	-----------	-----------

### Copings

600x600x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x400x20mm	P5	14kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x290x20mm	P5	10kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 600x600x20mm /80mm	P5	22kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x400x20mm /80mm	P5	17kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	14kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

NIO- Quadria Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30      >12500      >48      150      <0.1      ± 0,4 %, max ± 1,8 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension    Thickness	
---------	--	------------	------------------------	-------------	--	--

### Pavers & Tiles

600x600x20mm	P5	54kg/m <sup>2</sup>	21.62m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
--------------	----	---------------------	---------------------	-----------	-----------	-----------

### Copings

600x600x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x400x20mm	P5	14kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x290x20mm	P5	10kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm

# Strukture Series Technical Details \* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging \*

NIO - Quadria Collection (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
<b>Copings (Continued)</b>							
Rebated 600x600x20mm /80mm	P5	22kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	17kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	14kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

# Strukture Series Technical Details

\* Please enquire with us to confirm stock availability.  
Custom sizes are available by order. Weights are indicative only and exclude packaging \*

AON - Vialto Collection							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
<30	>10000	>35	145	<0.5	67.00	±0,5% / ±1.5 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
<b>Pavers &amp; Tiles</b>							
901.5x600x20mm	P5	46kg/m <sup>2</sup>	25.92m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm	
<b>Copings</b>							
901.5x500x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
901.5x290x20mm	P5	12kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
CHAYA - Vialto Collection							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
25	>13600	>50	145	<0.5	77.39	± 0,4 %, max ± 1,8 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
<b>Pavers &amp; Tiles</b>							
897x598x20mm	P5	46kg/m <sup>2</sup>	21.6m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm	
<b>Copings</b>							
897x500x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
897x290x20mm	P5	12kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 897x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 897x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

# Strukture Series Technical Details \* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging \*

CHAYA - Vialto Collection (Continued)						
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

## Copings (Continued)

Rebated 897x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
----------------------------------	----	-----------	----------	--------	---------	-----------

## KETTO - Vialto Collection

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO2	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30      >10000      >35      145      <0.5      76.00      ±0,5% / ±1.5 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

## Pavers & Tiles

901.5x600x20mm	P5	46kg/m <sup>2</sup>	25.92m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

## Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

## KETURI - Vialto Collection

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO2	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30      >10000      >35      145      <0.5      79.00      ±0,5% / ±1.5 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

## Pavers & Tiles

901.5x600x20mm	P5	46kg/m <sup>2</sup>	25.92m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

# Strukture Series Technical Details \* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging \*

KETURI - Vialto Collection (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	

## Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

## LIMA - Vialto Collection

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)

SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
<30	>10000	>35	145	<0.5	84.00	±0,5% / ±1.5 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

## Pavers & Tiles

901.5x600x20mm	P5	46kg/m <sup>2</sup>	25.92m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

## Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

# Strukture Series Technical Details

\* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging \*

SABA - Vialto Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

25 >13600 >50 145 <0.5 71.59 ±0,5% / ±1.5 mm

Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness	
---------	---------------------------------	------------	------------------------	-------------	---------------------------------------	--

## Pavers & Tiles

901.5x600x20mm	P5	46kg/m <sup>2</sup>	25.92m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

## Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

TELO - Vialto Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30 >10000 >35 145 <0.5 71.00 ±0,5% / ±1.5 mm

Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness	
---------	---------------------------------	------------	------------------------	-------------	---------------------------------------	--

## Pavers & Tiles

901.5x600x20mm	P5	46kg/m <sup>2</sup>	25.92m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

## Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

# Strukture Series Technical Details

\* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging \*

TELO - Vialto Collection (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	

## Copings (Continued)

Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

## TRESSI - Vialto Collection

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
<30	>10000	>35	145	<0.5		±0,5% / ±1.5 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

## Pavers & Tiles

901.5x600x20mm	P5	46kg/m <sup>2</sup>	25.92m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

## Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

# Stone Series Technical Details

\* Please enquire with us to confirm stock availability.  
Custom sizes are available by order. Weights are  
indicative only and exclude packaging \*

FOSSIL BLACK QUARTZ							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
<b>Pavers &amp; Tiles</b>							
600x600x20mm	P5	52kg/m <sup>2</sup>	23.04m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm	
<b>Copings</b>							
600x600x20mm	P5	19kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
MALMO							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO <sub>2</sub>	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
<b>Pavers &amp; Tiles</b>							
600x600x20mm	P5	52kg/m <sup>2</sup>	23.04m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm	
<b>Copings</b>							
600x600x20mm	P5	19kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

# Stone Series Technical Details

\* Please enquire with us to confirm stock availability.  
Custom sizes are available by order. Weights are  
indicative only and exclude packaging \*

MALMO (Continued)						
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

## Copings (Continued)

Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

OSLO						
Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO2	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

## Pavers & Tiles

600x600x20mm	P5	52kg/m <sup>2</sup>	23.04m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm
--------------	----	---------------------	---------------------	-----------	-----------	-----------

## Copings

600x600x20mm	P5	19kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
600x400x20mm	P5	13kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
600x290x20mm	P5	9kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

VIENNA						
Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm <sup>2</sup> )	Abrasion Resistance (mm <sup>3</sup> )	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO2	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm

# Stone Series Technical Details

\* Please enquire with us to confirm stock availability.  
 Custom sizes are available by order. Weights are  
 indicative only and exclude packaging \*

VIENNA (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
<b>Pavers &amp; Tiles</b>							
600x600x20mm	P5	52kg/m <sup>2</sup>	23.04m <sup>2</sup>	Rectified	+/- 0.5mm	+/- 0.5mm	
<b>Copings</b>							
600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	



1300 301 898  
[artisanexterior.com.au](http://artisanexterior.com.au)