

artisan EXTERIOR

FLOOR

PORCELAIN - ALL FORMATS

Product Specification Sheet



Table of Contents

Introduction.....	3
Product Reference Images	4-7
Struktura Series	4-5
Quadria Collection	4
Vialto Collection	4-5
Stone Series	6-7
Format Reference Images	8
Technical Details.....	9-11
Struktura Series	9-10
Quadria Collection	9-11
Eboro	9
Elva	9-10
Neberi	10
Nio	11
Vialto Collection	12-16
Aon	12
Chaya	12-13
Ketto	13
Keturi	13-14
Lima	14
Saba	15
Telo	15-16
Stone Series	17
Belgium	17
Fossil Black Quartz	17-18
Fossil Grey Quartz	18
Ivory Travertine	18-19
Malmo	19
Medium Travertine	20
Oslo	20-21
Silver Travertine	21
Somersby	21-22
Vienna	22
Zurich	23

Innovative Porcelain for Design and Performance

Artisan Exterior's porcelain collection combines cutting-edge manufacturing technology with the timeless appeal of natural stone. Sourced from leading global producers and warehoused locally, the range offers exceptional durability, superior performance, and a wide variety of designs. Our Porcelain Range includes the Struktura Series - featuring Vialto and Quadria Collections - and the Stone Series, with options suitable for both interior and exterior applications.

Available in a diverse selection of formats, colours, textures, and finishes, our porcelain tiles, pavers, and coping bring modern sophistication to any space. Whether you're drawn to sleek contemporary tones or the understated beauty of stone-effect finishes, every product delivers low-maintenance performance, family-friendly durability, and a P5 slip rating - making them ideal for pool surrounds and outdoor living.

Visit our ACT, NSW, or QLD studios to explore full-scale installations, discuss your project, and take home samples. For specifications or expert guidance, our team is ready to support your design from concept to completion.



Porcelain Pavers & Coping with Rebated Drop Edge
Struktura Series | Vialto Collection | Saba

Porcelain - Pavers & Tiles

STRUKTURE SERIES - QUADRIA COLLECTION



EBORO



ELVA



NEBERI



NIO

STRUKTURE SERIES - VIALTO COLLECTION



AON



CHAYA

Porcelain - Pavers & Tiles


STRUKTURE SERIES - VIALTO COLLECTION (Continued)



KETTO



KETURI

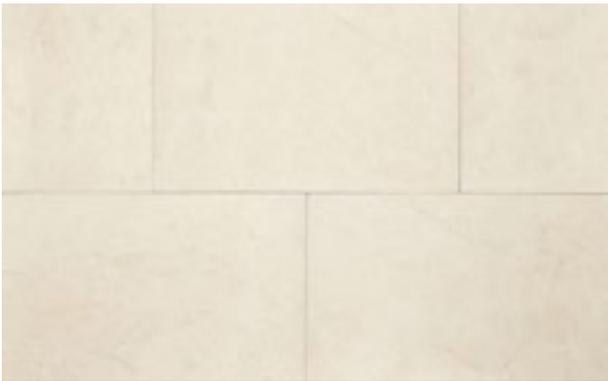

LIMA



SABA



TELO

Porcelain - Pavers & Tiles

STONE SERIES



BELGIUM



FOSSIL BLACK QUARTZ



FOSSIL GREY QUARTZ



IVORY TRAVERTINE



MALMO



MEDIUM TRAVERTINE

Porcelain - Pavers & Tiles

STONE SERIES (Continued)



OSLO




SILVER TRAVERTINE



SOMERSBY



VIENNA

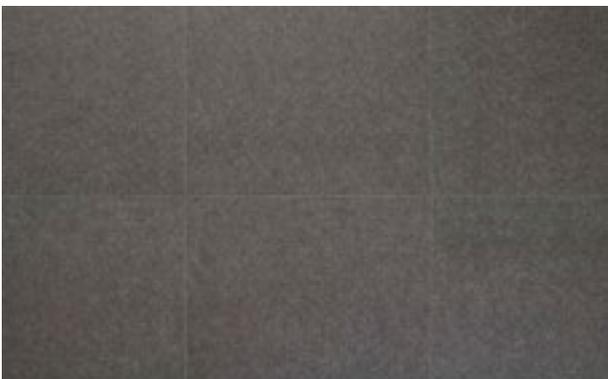

ZURICH

Format Reference Images

PAVERS & TILES



Tile Formats

Up to 20mm thickness, within tolerance

Paver Formats

20mm thickness and above, within tolerance

COPING, REBATES & PROFILES



Coping



Rebate (Drop Edge)



Bullnose



Pencil Round



Rebated Profile

Strukture Series Technical Details * Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

EBORO - Quadria Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30 >12500 >48 150 <0.1 ± 0,4 %, max ± 1,8 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness	
---------	--	------------	------------------------	-------------	--	--

Pavers & Tiles

600x600x20mm P5 54kg/m² 21.62m² Rectified +/- 0.5mm +/- 0.5mm

Copings

600x600x20mm P5 20kg each By Order Rectified (Profiles Available) +/- 2mm +/- 0.5mm

600x400x20mm P5 14kg each By Order Rectified (Profiles Available) +/- 2mm +/- 0.5mm

600x290x20mm P5 10kg each By Order Rectified (Profiles Available) +/- 2mm +/- 0.5mm

Rebated
600x600x20mm
/80mm P5 22kg each By Order Rebate +/- 2mm +/- 0.5mm

Rebated
600x400x20mm
/80mm P5 17kg each By Order Rebate +/- 2mm +/- 0.5mm

Rebated
600x300x20mm
/80mm P5 14kg each By Order Rebate +/- 2mm +/- 0.5mm

ELVA - Quadria Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

25 >13600 >50 145 <0.5 ± 0,4 %, max ± 1,8 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness	
---------	--	------------	------------------------	-------------	--	--

Pavers & Tiles

600x600x20mm P5 54kg/m² 21.62m² Rectified +/- 0.5mm +/- 0.5mm

Copings

600x600x20mm P5 20kg each By Order Rectified (Profiles Available) +/- 2mm +/- 0.5mm

600x400x20mm P5 14kg each By Order Rectified (Profiles Available) +/- 2mm +/- 0.5mm

600x290x20mm P5 10kg each By Order Rectified (Profiles Available) +/- 2mm +/- 0.5mm

Strukture Series Technical Details * Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

ELVA - Quadria Collection (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	

Copings (Continued)

Rebated 600x600x20mm /80mm	P5	22kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x400x20mm /80mm	P5	17kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	14kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

NEBERI - Quadria Collection

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
25	>13600	>50	145	<0.5		± 0,4 %, max ± 1,8 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Pavers & Tiles

600x600x20mm	P5	54kg/m ²	21.62m ²	Rectified	+/- 0.5mm	+/- 0.5mm
--------------	----	---------------------	---------------------	-----------	-----------	-----------

Copings

600x600x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x400x20mm	P5	14kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x290x20mm	P5	10kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 600x600x20mm /80mm	P5	22kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x400x20mm /80mm	P5	17kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	14kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

Strukture Series Technical Details

* Please enquire with us to confirm stock availability.
 Custom sizes are available by order. Weights are
 indicative only and exclude packaging *

NIO - Quadria Collection							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
<30	>12500	>48	150	<0.1		± 0,4 %, max ± 1,8 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
Pavers & Tiles							
600x600x20mm	P5	54kg/m ²	21.62m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	14kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	10kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	22kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	17kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	14kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

Strukture Series Technical Details

* Please enquire with us to confirm stock availability.
Custom sizes are available by order. Weights are indicative only and exclude packaging *

AON - Vialto Collection							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
<30	>10000	>35	145	<0.5	67.00	±0,5% / ±1.5 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
Pavers & Tiles							
901.5x600x20mm	P5	46kg/m ²	25.92m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
901.5x500x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
901.5x290x20mm	P5	12kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
CHAYA - Vialto Collection							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
25	>13600	>50	145	<0.5	77.39	± 0,4 %, max ± 1,8 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
Pavers & Tiles							
897x598x20mm	P5	46kg/m ²	21.6m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
897x500x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
897x290x20mm	P5	12kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 897x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 897x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

Strukture Series Technical Details * Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

CHAYA - Vialto Collection (Continued)						
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Copings (Continued)

Rebated 897x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
----------------------------------	----	-----------	----------	--------	---------	-----------

KETTO - Vialto Collection

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO2	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30 >10000 >35 145 <0.5 76.00 ±0,5% / ±1.5 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Pavers & Tiles

901.5x600x20mm	P5	46kg/m ²	25.92m ²	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

KETURI - Vialto Collection

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO2	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30 >10000 >35 145 <0.5 79.00 ±0,5% / ±1.5 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Pavers & Tiles

901.5x600x20mm	P5	46kg/m ²	25.92m ²	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

Strukture Series Technical Details * Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

KETURI - Vialto Collection (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	

Copings							
901.5x500x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
901.5x290x20mm	P5	12kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

LIMA - Vialto Collection						
Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
<30	>10000	>35	145	<0.5	84.00	±0,5% / ±1.5 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Pavers & Tiles							
901.5x600x20mm	P5	46kg/m ²	25.92m ²	Rectified	+/- 0.5mm	+/- 0.5mm	

Copings							
901.5x500x20mm	P5	20kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
901.5x290x20mm	P5	12kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

Strukture Series Technical Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

SABA - Vialto Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

25 >13600 >50 145 <0.5 71.59 ±0,5% / ±1.5 mm

Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness	
---------	---------------------------------	------------	------------------------	-------------	--	--

Pavers & Tiles

901.5x600x20mm	P5	46kg/m ²	25.92m ²	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

TELO - Vialto Collection						
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2

<30 >10000 >35 145 <0.5 71.00 ±0,5% / ±1.5 mm

Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness	
---------	---------------------------------	------------	------------------------	-------------	--	--

Pavers & Tiles

901.5x600x20mm	P5	46kg/m ²	25.92m ²	Rectified	+/- 0.5mm	+/- 0.5mm
----------------	----	---------------------	---------------------	-----------	-----------	-----------

Copings

901.5x500x20mm	P5	20kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
901.5x290x20mm	P5	12kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm
Rebated 901.5x600x20mm /80mm	P5	28kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

Strukture Series Technical Details * Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

TELO - Vialto Collection (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	

Copings (Continued)

Rebated 901.5x400x20mm /80mm	P5	20kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 901.5x300x20mm /80mm	P5	18kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

Stone Series Technical Details

* Please enquire with us to confirm stock availability.
Custom sizes are available by order. Weights are indicative only and exclude packaging *

BELGIUM							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
FOSSIL BLACK QUARTZ							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

Stone Series Technical Details

* Please enquire with us to confirm stock availability.
Custom sizes are available by order. Weights are indicative only and exclude packaging *

FOSSIL BLACK QUARTZ (Continued)						
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Copings (Continued)

Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

FOSSIL GREY QUARTZ

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)

SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Pavers & Tiles

600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm
--------------	----	---------------------	---------------------	-----------	-----------	-----------

Copings

600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

IVORY TRAVERTINE

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)

SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm

Stone Series Technical Details

* Please enquire with us to confirm stock availability.
Custom sizes are available by order. Weights are
indicative only and exclude packaging *

IVORY TRAVERTINE (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
MALMO							
Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage	
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

Stone Series Technical Details

* Please enquire with us to confirm stock availability.
Custom sizes are available by order. Weights are
indicative only and exclude packaging *

MEDIUM TRAVERTINE							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
OSLO							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

Stone Series Technical Details

* Please enquire with us to confirm stock availability.
Custom sizes are available by order. Weights are indicative only and exclude packaging *

OSLO (Continued)						
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Copings (Continued)

Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

SILVER TRAVERTINE

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm

Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness

Pavers & Tiles

600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm
--------------	----	---------------------	---------------------	-----------	-----------	-----------

Copings

600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm

SOMERSBY

Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm

Stone Series Technical Details

* Please enquire with us to confirm stock availability.
Custom sizes are available by order. Weights are
indicative only and exclude packaging *

SOMERSBY (Continued)							
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
VIENNA							
Crystalline Silica (%)	Strength (MPa)			Absorption	LRV Rating	Warpage	
	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance <small>AS 4586:2013</small>	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified <small>(Profiles Available)</small>	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	

Stone Series Technical Details

* Please enquire with us to confirm stock availability.
Custom sizes are available by order. Weights are indicative only and exclude packaging *

ZURICH							
Crystalline Silica	Strength (MPa)			Absorption	LRV Rating	Warpage	
(%)	Breaking Strength (N)	Modules Rupture (N/mm ²)	Abrasion Resistance (mm ³)	Water Absorption (%)	Light Reflection Value (%)	Dimension (mm)	
SiO ₂	ISO 10545-4	ISO 10545-4	ISO 10545-6	ISO 10545-3	ISO 10545-18	ISO 10545-2	
65	>11000	>42.5	<175	<0.11		±0,5% / ±2 mm	
Size mm	Slip Resistance AS 4586:2013	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance Dimension Thickness		
Pavers & Tiles							
600x600x20mm	P5	52kg/m ²	23.04m ²	Rectified	+/- 0.5mm	+/- 0.5mm	
Copings							
600x600x20mm	P5	19kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x400x20mm	P5	13kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
600x290x20mm	P5	9kg each	By Order	Rectified (Profiles Available)	+/- 2mm	+/- 0.5mm	
Rebated 600x600x20mm /80mm	P5	21kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x400x20mm /80mm	P5	16kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	
Rebated 600x300x20mm /80mm	P5	13kg each	By Order	Rebate	+/- 2mm	+/- 0.5mm	



1300 301 898
artisanexterior.com.au