


TECHNICAL DATA SHEET

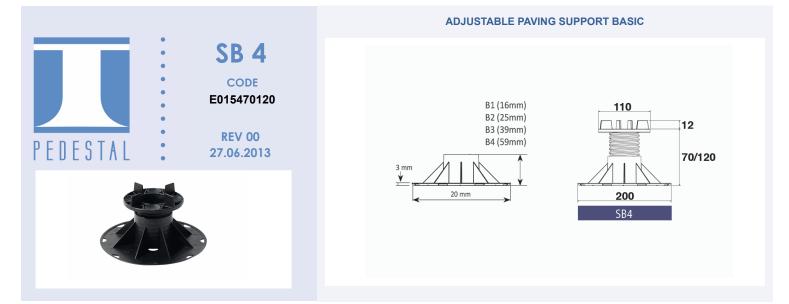

ITEM SPECIFICATION		
	"Basic" type pedestal for raised floors with adjustable height from 70mm to 120mm. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface and by an intermediate screw with head element with 4 tabs of h.12 mm in 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need.	
PRODUCT RANGE	PEDESTAL	
PRODUCT NAME	SB 4	
CHARACTERISTICS	regulation in highness	
RAW MATERIAL	Polypropylene	
ENVIRONMENTAL IMPACT	recyclable material - non dangerous	
APPLICATIONS SURFACES	On any waterproofing membrane, or any insulating panel or any compact and solid surface	
APPLICATIONS AREA	Usable with any prefabricated self sustaining element for exterior flooring	

CHARACTERISTICS	UNIT	VALUE	TOLERANCE	
BASE DIAMETER	mm	195	+/- mm 1,0	
BASE THICKNESS	mm	3	+/- mm 0,2	
HEAD DIAMETER	mm	110	+/- mm 0,8	
LAYING SURFACE OF THE BASE	cmq	298	+/- cmq 5	
MINIMUM HEIGHNESS	mm	70	+/- mm 1,0	
MAXIMUM HEIGHNESS	mm	120	+/- mm 1,5	
TABS THICKNESS	mm	4	+/- mm 0,2	
TABS HIGHNESS	mm	12	+/- mm 0,2	
WEIGHT	kg	0,250	+/- 5 %	
TECHNICAL PROPERTIES		UNIT	VALUE	
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* (calculated at medium highness, between minimum and maximum extension)		KN	19,21	
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* (calculated at medium highness, between minimum and maximum extension)		KN	11,38	
SLOPE CORRECTION		%	0 - 5	
SHORE		Shore d	70 (+/- 3)	
*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg				
PHYSICAL PROPERTIES	METHOD	UNIT	VALUE	
FIRE REACTION*	UNI EN 13501-1:2009	class	Е	
LOW TEMPERATURES REACTION			-40°	
*Tests made by Giordano S.p.A. Institute of Bellaria-laea Marina (RN)-Ital PACKAGING AND STORAGE	V			
PIECES PER BOX	25			
PIECES PER PALLET	30			
BOX DIMENSION	cm 40x40x42			
BOX WEIGHT	kg 7			
PALLET DIMENSION	cm 80 x 120			
The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.				
LAYING OF THE PRODUCT				

The product is simply laid on the laying area, with no need of any glue or fixing

The above data are relevant to current production and may be changed or updated by Eterno lvica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno lvica. All rights reserved.





Eterno Ivica srl - Via Austria 25/E - Z.I.Sud 35127 Padova - Italy T Exp. +39 049 8530102, T +39 049 8530101, F +39 049 8530111 eternoivica@eternoivica.com - www.eternoivica.com

